

Model:D4185-311

characteristics:

It is used to drive IGBT, MOS pipe and transmit high-frequency signal isolation.

Technical indicators:

Installation method: PCB

Flame resistance: UL94-V0

Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Storage temperature: $-50^{\circ}\text{C} \sim +90^{\circ}\text{C}$

Frequency range: 10KHz~100KHz


Dielectric strength: 4.5KV 50Hz 2s




Electrical parameters:

Vout microsecond integral	1000	μVs
Pulse width (D=1:2)	33.3	μs
Ratio	3 : 1 : 1	
Input amplitude	30	V
Output amplitude	8	V
Load impedance	7	Ω
Leading edge time	≤ 1	μs
Main circuit operating voltage	380	V
Weight		g


Connection diagram:

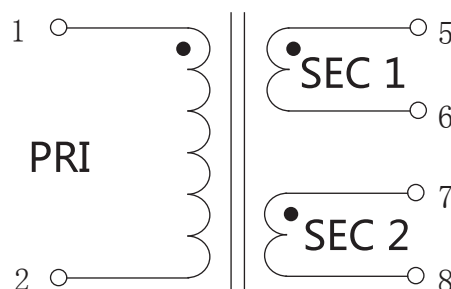

Dimensions (in mm) :

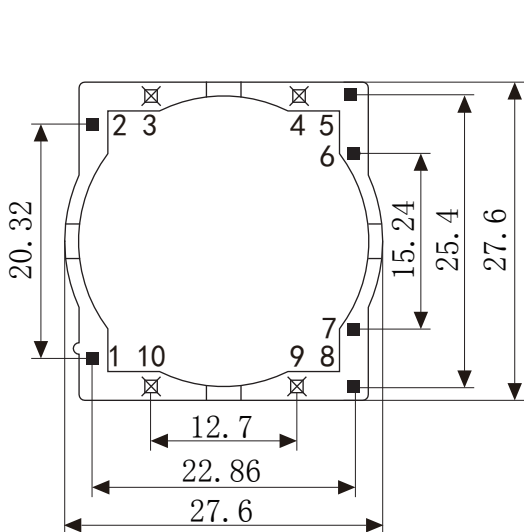

Bottom View

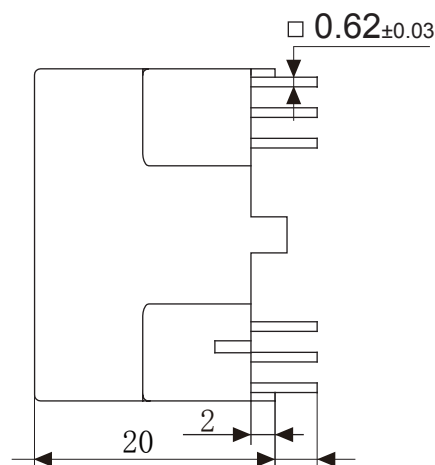

Side View