


Model:D5191-211

characteristics:

It is used to drive IGBT,MOS pipe and transmit high-frequency signal isolation.

Technical indicators:


- Installation method: PCB
- Flame resistance: UL94-V0
- Operating temperature: -20℃~+50℃
- Storage temperature: : -40℃~+85℃
- Frequency range: 15KHz~200KHz
- Dielectric strength: 3.5KV 50Hz 5s

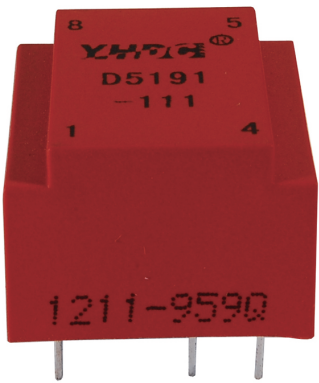


Electrical parameters:

Vout microsecond integral	≥600	μvs
Pulse width (D=1:2)	30	μs
Ratio	2:1:1	
Input amplitude	20	V
Output amplitude	≥9	V
Load impedance	100	Ω
Leading edge time	≤0.5	μs
Main circuit operating voltage	400	V
Weight	18	g


Connection diagram:

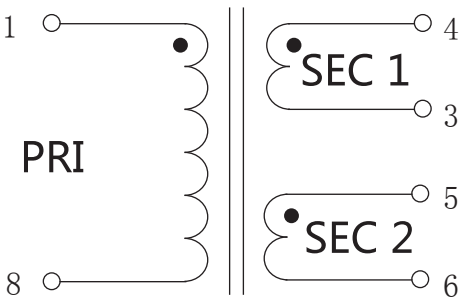

Dimensions (in mm) :

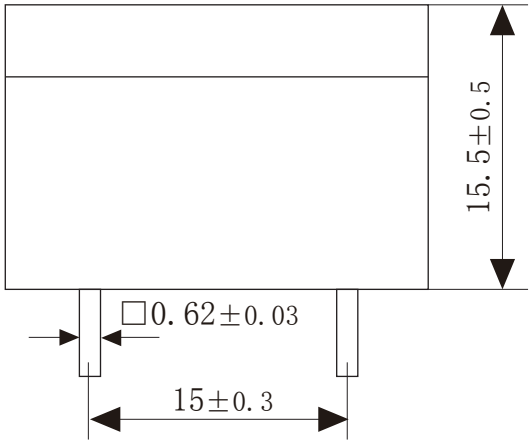

Front View

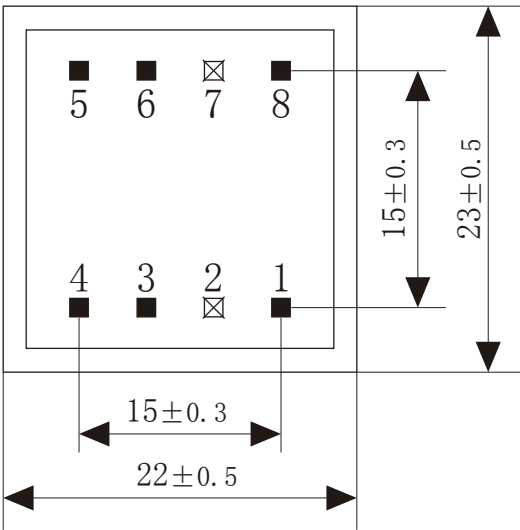

Bottom View